

# HIXCO



**BHE2243**  
7/8" SDS Rotary Hammer



**KHE2443**  
1" SDS Rotary Hammer  
with Rotostop

Model #	BHE2243	KHE2443
Order #	604480420	600597420
Single blow energy (measured in joules)	2.3	2.3
Variospeed (V) electronics	●	●
LongLife motor	●	●
Suitable for light chiselling work		●
Percussion stop for drilling only operations	●	●
Aluminum die-cast gear housing	●	●
Reversing switch	●	●
Metabo slip clutch	●	●
Rubber coated handle	●	●
Auto-stop carbon brushes	●	●
Winding protection grid	●	●
Maximum tightening torque	133 inch lbs. Inquire about 220V availability	133 inch lbs. Inquire about 220V availability
Capacity		
- in concrete using solid bits	7/8"	1"
- in mild steel	1/2"	1/2"
- in softwood	1 3/16"	1 3/16"
No-load speed (RPM)	0-1150	0-1150
No-load blows per minute (BPM)	0-5400	0-5400
Amps	7.1	7.0
Rated input watts	800	800
Tool weight	6.8 lbs.	7.0 lbs.
Shipping weight	11.0 lbs.	11.2 lbs.
Length	13"	13 5/8"
Carrying case	344454110 (standard) 656304000 (optional metal)	344454110 (standard) 656304000 (optional metal)
Standard Equipment:	Side handle (314000840) Depth gauge (341511630)	Side handle (314000840) Depth gauge (341511630)
Optional Equipment:	Dust extraction kit (631600000)	Dust extraction kit (631600000)

# HIXCO



**KHE-D24**  
1" SDS Rotary Hammer  
w/Rotostop



**KHE-D28**  
1 1/8" SDS Rotary Hammer  
w/Rotostop

## D-Stroyer™ Rotary Hammers



*The most powerful SDS  
D-handle rotary hammer.*

### KHE-D28

- Most powerful D-handle tool...  
8.2 Amps vs. Bosch Bulldog  
Extreme 7.5 Amps
- Greatest drilling capacity...  
1-1/8" vs. Bosch Bulldog  
Xtreme and others at 1"
- Metabo VTC Speed Stabilization  
makes the KHE-D28 the fastest  
in its class!

### KHE-D24

- 1" drilling capacity in concrete
- Compact and lightweight
- Metabo Premium Power motor

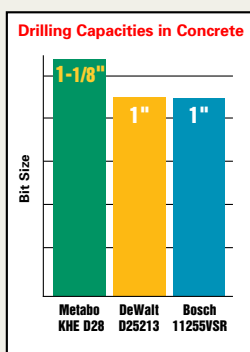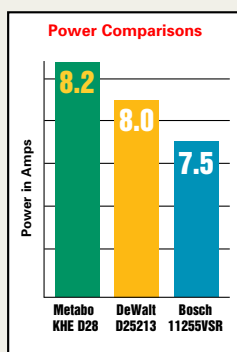

Model #	KHE-D24	KHE-D28
Order #	600223420	600224420
Single blow energy (measured in joules)	0-2.2	0-2.5
Variospeed (V) electronics	●	
Vario tacho constamatic (VTC) electronics		●
LongLife motor	●	●
Quick-change chuck system		●
Chisel positions	● 12 settings	● 12 settings
Percussion stop for drilling only operations	●	●
Rotation stop for chiseling operations	●	●
Aluminum die-cast gear housing	●	●
Reversing switch	●	●
Metabo slip clutch	●	●
Rubber coated handle	●	●
Carbon brush wear indicator		●
Auto-stop carbon brushes	●	●
Winding protection grid	●	●
Maximum tightening torque	106 inch lbs.	177 inch lbs
<b>Capacity</b>		
- in concrete using solid bits	1"	1 1/8"
- in brickwork using thin wall core bits	3 1/8"	3 1/2"
- in mild steel	1/2"	1/2"
- in softwood	1 3/16"	1 9/16"
No-load speed (RPM)	0-1000	0-1000
No-load blows per minute (BPM)	0-4600	0-4600
Amps	5.6	8.2
Rated input watts	720	1010
Tool weight	7.4 lbs.	8.1 lbs.
Shipping weight	12.3 lbs.	13.0 lbs.
Length	16 3/4"	18"
Carrying case	344454120 (standard)	344454120 (standard)
Standard Equipment:	Side handle (314000770)	Side handle (314000770)
	Depth gauge (341511630)	Depth gauge (341511630)
Optional Equipment:	Dust extraction kit (631600000)	1/2" Keyless 3-jaw chuck (631921000) Dust extraction kit (631600000)

(See page 31 for SDS-Plus masonry bits and page 34 for SDS-Plus chisels)

# HIXCO



**UHE2850 Multi**  
1 1/8" Multi-purpose Hammer  
w/Rotostop



**KHE3250**  
1 1/8" SDS Rotary Hammer  
w/Rotostop

NEW

## UHE2850 Multi Hammer

### 3 Tools in 1

**1- 2 Speed Drill**

**2- 1-1/8" Rotary Hammer**

**3- Chipping Gun**

*...all in a single unit!*

This versatile, powerful rotary hammer lets you perform drilling, impact drilling or rotation-only operations with a single tool.

Unique to this tool is a rotary hammer function that allows for effective drilling of concrete, brick, and other masonry materials. A chiseling function allows chiseling of the same materials. By switching to the two speed drill mode you can effectively drill into virtually any non-masonry material: wood, steel, plastic, glass, etc. All materials, one tool!

To further enhance versatility and functionality, the UHE Multi Hammer is furnished with a quick-change SDS chuck... and an additional quick-change three-jawed chuck that accepts a full range of non-masonry bits and allows bit changes without the use of tools.

SDS chuck



Quick-change, three-jawed chuck



**When you're looking for on-the-job versatility and long-lasting performance, the Metabo UHE2850 Multi Hammer gives you more...much more!**

Model #	UHE2850 Multi	KHE3250
Order #	600712420	600637420
Single blow energy (measured in joules)	0-2.75	0-3.1
Vario tacho constamatic (VTC) electronics	●	
Variospeed (V) electronics		●
LongLife motor	●	●
2-speed gear-box for drilling wood or metal	●	
Quick-change chuck system	●	
Chisel positions	● 30 settings	● 12 settings
Percussion stop for drilling only operations	●	●
Rotation stop for chiseling operations	●	●
Aluminum die-cast gear housing	●	●
Reversing switch	●	●
Metabo slip clutch	●	●
Rubber coated handle	●	●
Carbon brush wear indicator	●	
Auto-stop carbon brushes	●	●
Winding protection grid	●	●
Electronic speed stabilization	●	
Variable speed controlled by adjusting dial	●	
Winding temperature monitor	●	
Swivel cord connection	●	●
Maximum tightening torque	195 inch lbs.	177 inch lbs.
	Inquire about 220V availability	
Capacity		
- in concrete using solid bits	1 1/8"	1 1/4"
- in brickwork using thin wall core bits	3 1/8"	3 1/8"
- in mild steel	1/2" - 5/16"	1/2"
- in softwood	2 5/8" - 3/4"	1 3/8"
No-load speed (RPM)	0-950/0-2600	0-1150
No-load blows per minute (BPM)	0-4400	0-4470
Amps	9.0	8.5
Rated input watts	1010	800
Tool weight	8.1 lbs.	7.3 lbs.
Shipping weight	13.5 lbs.	12.5 lbs.
Length	15 9/16"	12.5"
Carrying case	344454110 (standard)	344454080 (standard)

Standard Equipment:	UHE2850 Multi	KHE3250
	Side handle (314001230)	Side handle (314000880)
	Depth gauge (343398230)	Depth gauge (341511630)
	1/2" Keyless 3-jaw chuck (631930000)	
	SDS chuck (316046990)	
Optional Equipment:	Dust extraction kit (631600000)	



**KHE76**  
2" SDS-Max Rotary Hammer



**KHE56**  
1 3/4" SDS-Max Rotary Hammer



**KHE96**  
2" SDS-Max Rotary Hammer

Model #	KHE56	KHE76	KHE96
Order #	600340420	600341420	600596420
Single blow energy (measured in joules)	1-14.0	1-16.0	1-27.0
Vario tacho constamatic (VTC) electronics	●	●	●
Suitable for chiselling work w/rotation stop	●	●	●
Chisel positions	● 12 settings	● 12 settings	● 16 settings
MVT vibrattech handles	●	●	●
Active vibration control		●	
Metal die-cast gear housing	● magnesium	● magnesium	● aluminum
Impact reduction switch	●	●	
Metabo slip clutch	●	●	●
Carbon brush wear indicator	●	●	●
Variable speed controlled by adjusting dial			●
Auto-stop carbon brushes	●	●	●
Winding protection grid	●	●	●
Electronic speed stabilization	●	●	●
360° Support handle	●	●	●
Maximum tightening torque	796 inch lbs.	796 inch lbs.	1062 inch lbs.
Capacity	Inquire about 220V availability	Inquire about 220V availability	Inquire about 220V availability
- in concrete using solid bits	1 3/4"	2"	2"
- in concrete using core bits	4"	6"	6"
No-load speed (RPM)	0-450	0-300	125-250
Blows per minute (BPM)	0-2840	0-2735	0-1950
Amps	14	15	15
Rated input watts	1300	1500	1700
Tool weight	17.75 lbs.	18.5 lbs.	28 lbs.
Shipping weight	25.75 lbs.	28.25 lbs.	40.2 lbs.
Length	18"	19 5/16"	27 3/4"
Carrying case	344453630 (standard)	344453760 (standard)	344453190 (standard)
Standard Equipment:	Anti-vibration Side handle (314001080) Depth gauge (331050750) Grease (631800000) Cleaning cloth	Anti-vibration Side handle (314001150) Depth gauge (331050750) Grease (631800000) Cleaning cloth	Anti-vibration Side handle (314001130) "D" support handle (316042080) Grease (631800000) Cleaning cloth

(See page 32 for SDS-Max masonry bits and page 34 for SDS-Max chisels)



**MHE56**  
SDS-Max Demolition Hammer



**MHE96**  
SDS-Max Demolition Hammer

Model #	MHE56	MHE96
Order #	600366420	600396420
Single blow energy (measured in joules)	1-14.0	1-27.0
Vario tacho constamatic (VTC) electronics	●	●
Lock on switch	●	●
Chisel positions	● 12 settings	● 16 settings
MVT Vibration damping construction	●	●
Metal die-cast gear housing	● magnesium	● aluminum
Impact reduction switch	●	
Carbon brush wear indicator	●	●
Auto-stop carbon brushes	●	●
Winding protection grid	●	●
Electronic speed stabilization	●	●
Variable speed controlled by adjusting dial		●
360° Support handle	●	●
	Inquire about 220V availability	Inquire about 220V availability
Blows per minute (BPM)	0-2840	0-1950
Amps	14	15
Rated input watts	1300	1600
Tool weight	16.75 lbs.	26.5 lbs.
Shipping weight	24.8 lbs.	38.6 lbs.
Length	18"	27 3/4"
Carrying case	344453630 (standard)	344453190 (standard)
Standard Equipment:	"D" Support handle (316042550) Grease (631800000) Cleaning cloth	Anti-vibration Side handle (314001050) "D" Support handle (316042080) Grease (631800000) Cleaning cloth

(See page 34 for SDS-Max chisels)